


Heavy trunk power cable and tee data sheet

Description

The trunk power cable provides electrical power to the View Dynamic Controls system. Power is fed to the trunk cable from a power supply using a trunk power cable and trunk power tee. See power supply data sheet or the View Design Guide for power supply sizing and connection instructions.

Heavy trunk power cable

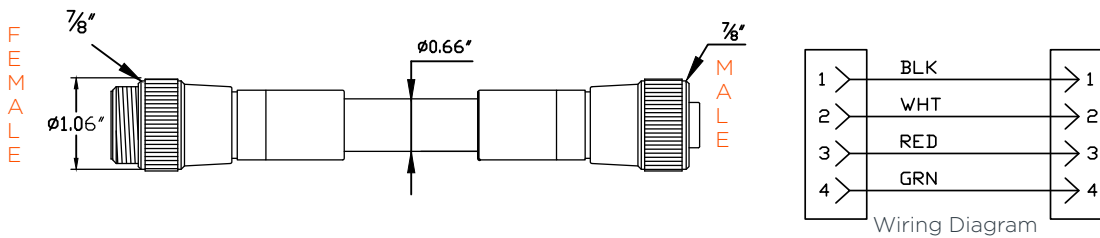


Cable rating

Class 2 Plenum (CL2P) rated cables are available. To order, append the model number with "-CL2P".

View model no: CS-LC4F-LC4M-XXX
Replace XXX with desired length in inches (refer to length chart).
View part description: CORDSET, POWER, LRG CONN 4P-F, LRG CONN 4P-M

LENGTH CHART	
L(in)	L(m)
20	0,5
39	1
78	2
118	3
158	4
197	5
236	6
276	7
315	8
354	9
394	10
787	20
1181	30
1575	40
1967	50
Max Current	10A
Max Voltage	100V

Heavy trunk power cable

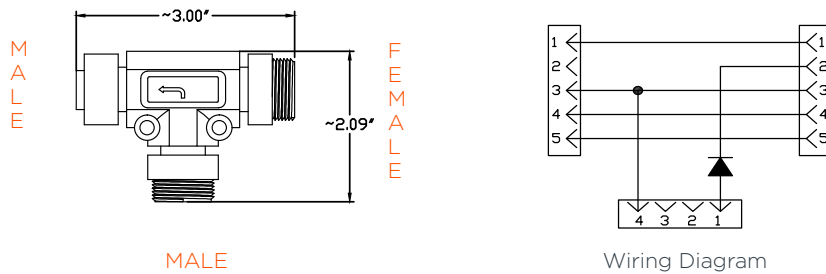

View model no: P4TEE-LC5F-LC5M-LC4M
View part description: TEE, POWER, LRG CONN 5P-F, LRG CONN 5P-M, LRG CONN 4P-M

Max Current	9A
Max Voltage	300V

Interconnected system

The heavy power cable and tee are used in conjunction with:

- Heavy trunk cable
- Heavy trunk connector
- Heavy trunk terminator

Warranty

All cables and components carry a warranty for a period of 5 years from date of delivery by View. Refer to standard warranty terms and conditions for more details.

Project submittal information

JOB NAME:	NOTES:
JOB NUMBER:	