


## Door Loop

The Door Loop provides power and control to a door unit containing View Smart Glass. The Door Loop installs in the upper corner of the hinged side of the door.

### Features

- Flexible armored stainless steel cable conduit with metal end caps (fig. 1).
- Maximum flexibility for installation site on door/frame.
- 18" armored cable with 24" IGU cable/connector pre-installed and pre-terminated.
- Uses industry standard Door Loop modified for View-specific installation.
- Tested to 1 million cycles.
- Three standard finishes available: aluminum, oil rubbed bronze and stainless steel.

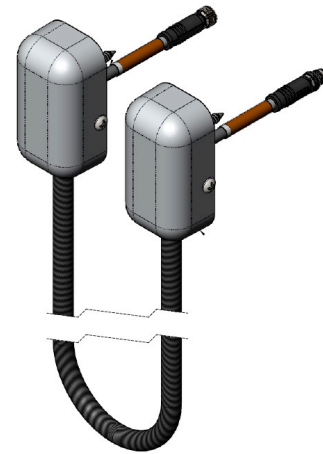

### Warranty

All cables and components carry a warranty for a period of 5 years from date of delivery by View. Refer to standard warranty terms and conditions for more details.

### Requirements for Cold Weather Installation


If the cable has to be installed when the temperature is below 32°F, the following precautions should be taken to ensure that the jacket does not crack:

- Store the cable in a heated area with temperatures above 50°F for 24 hours before installation.
- Cables need to be handled with care and not dropped, kinked, or bent roughly.
- Pull cables slowly, use large sheaves and lubes suitable for cold temperatures.



### Ordering Information

Part Number	Description
010-101597-01	ASM, DOOR LOOP, ARMORED, 3/8" DIA., FLEX, 18.0" LOOP, ALUM, M8K
010-101597-02	ASM, DOOR LOOP, ARMORED, 3/8" DIA., FLEX, 18.0" LOOP, DURANODIC, M8K
010-101597-03	ASM, DOOR LOOP, ARMORED, 3/8" DIA., FLEX, 18.0" LOOP, BLACK, M8K
010-101597-04	ASM, DOOR LOOP, ARMORED, 3/8" DIA., FLEX, 18.0" LOOP, WHITE, M8K
010-101597-05	ASM, DOOR LOOP, ARMORED, 3/8" DIA., FLEX, 24.0" LOOP, ALUM, M8K
010-101597-06	ASM, DOOR LOOP, ARMORED, 3/8" DIA., FLEX, 24.0" LOOP, DURANODIC, M8K

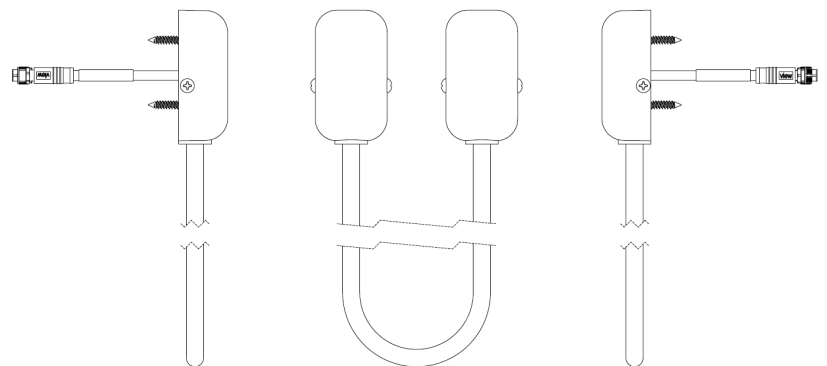

*Data subject to change. See Door Loop Transfer Installation Guide for further details on dimensions and installation.*